


## Model Sheet

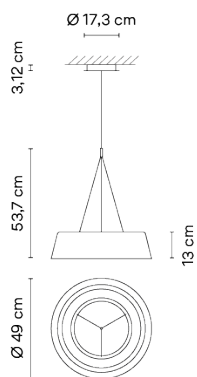

**Optional: Extra cable length**  
Min. quantity, upcharge and extra lead time apply

<b>Finish</b>	<input checked="" type="radio"/> 11 Black NCS S 8500-N
	<input type="radio"/> 25 Beige D1 NCS S 4005-Y50R
<b>LED temperature color</b>	2700 K
<b>Dimming</b>	CASAMBI / DALI / PUSH 1-10V
<b>Installation type</b>	Built-in XS / Remote Micro / Surface Canopy

**Materials** Shade: opal triplex glass  
Ring: Aluminum

**Light source** 1 x LED 16,7W 900mA



**LED** CRI>90 2170 lm 130 2700 K

**Driver** Constant Current 900 100-240 V V 50-60 Hz HZ

Dimmable  LED  IP20

Bi-volt  50-60Hz

**Application** Hanging lamps

**Packaging** 1 Box  
0,6 m x 0,6 m x 0,27 m  
Gross weight 6  
Net weight 2  
Vol. 0.0972

### Lighting effect

#### Volumetric Diffuser

Subtly directed, diffused light that generates a soft hierarchy of light on to the illuminated surface



### Photometric Data

